


DDC140 Display modul

Basic functions

- Display module DDC140 for the DDC3000 Central Control Units DDC3002, DDC3003, DDC3200, DDC3300 and DDC3350.
- manual operator control level with keyboard and graphic-capable, illuminated LCD display.
- simultaneous display of 3 DDC data points
- interactive dialog in plaintext
- complete operation of the entire DDC3000 system
- operation of all parameters of the operator control level, such as current values, setpoints, times, malfunction messages and manual (switching).

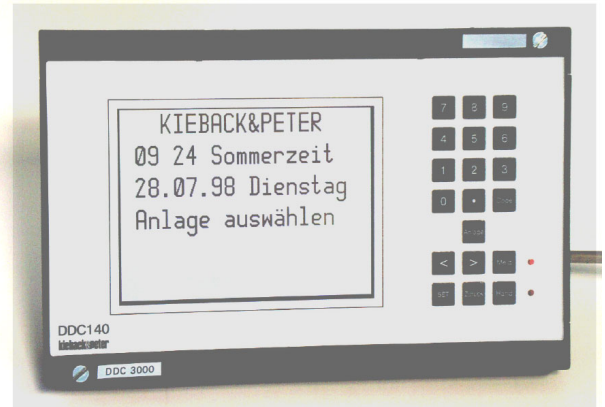


Technical data

interfaces	serial interface RS232 connection to serial interface of the DDC3000 Central Control Unit
displays	LCD display illuminated; 72mm x 96mm; 320 x 240 Pixel, graphic-capable
operation	membrane keypad with spring contacts
nominal voltage	24V AC ±10%; 12VA
deg. of encl. protection	IP40
ambient temperature	0..45°C
ambient humidity	in operation: 20..80%rF, non-condensing shut down: 5..90%rF, non-condensing
housing	19" short cassette of plastic; 4-fold cassette 202mm x 132mm x 45mm
front panel section	200.4mm x 112.0mm
weight	0.650kg
identification	CE

Date 22.12.1999

Wiring diagram

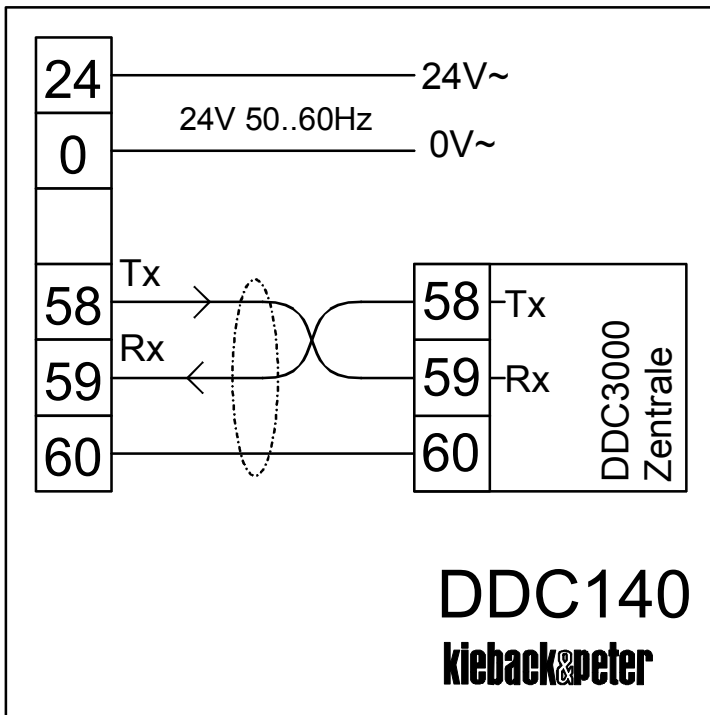

Mounting dimensions

