

Control Cabinet Bus Module SBM30

Basic function

Control Cabinet Bus Module SBM with 21 analog inputs and 7 analog outputs.

Every analog input is switchable with a separate parameter to a measuring element KP10 or voltage signal 0..10V.

The analog outputs are prepared for 0.10V. Accompanying LED display the state of the analog outputs.




Technical data

Bus connection	Control Cabinet Bus; SBM bus	16 Control Cabinet Bus Module SBM; 200m; 40kBaud; CAN
Inputs and outputs	21 analog inputs AE	Measuring element KP10 or 0..10V parameterizable Temperature range: -50..+150°C
	7 analog outputs AA for SBM	0..10V, 5mA, short-circuit resisant 24V AC ±10%; 50..60Hz; 9.4VA
Nominal voltage		
Fuse	630mA	
Address switch	00 .. 16 with 2 rotary switches behind the front panel	
Displays	LED Bus, LED Error 7 LED, display of the state of the analog outputs	
Switch / push-button	no	
Degree of enclosure protection	IP40	
Ambient temperature	0..45°C	
Ambient humidity	in operation: 20..80%rF, not condensing out of operation: 5..90%rF, not condensing	
Housing	19" short cassette made of plastic, two-fold width with a plug-in base W x H x D; 101mm x 132mm x 137mm	
Front panel cut-out	98.8mm x 112.0mm	
Weight	0,4kg	
Identification	CE	

Date 08.11.2001

Wiring Diagram

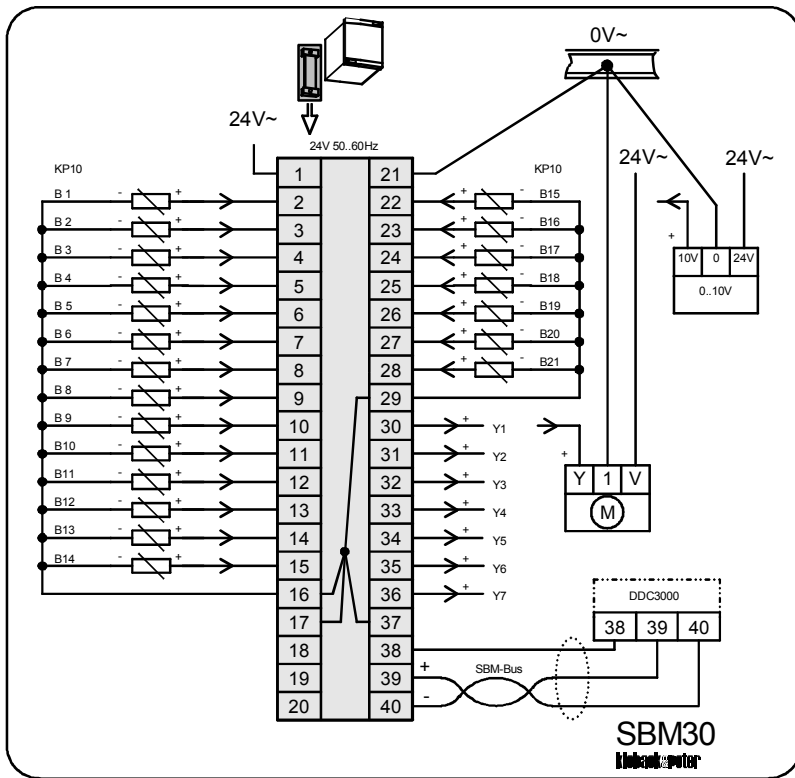

Installation Dimensions

