


Dip sleeve/protective spiral for KR/LR 80/85 and for sleeve- and air sensors

For applications in the industrial and heating technology field

THK/NTHK

SW-200/SW-200-12

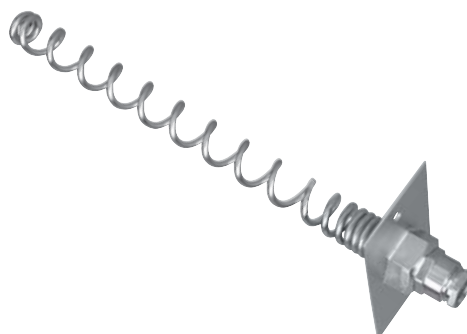

Type	Item No.	Length L	Diameter I x A*	Material	max. pressure (P / bar)	PG
Dip sleeves for KR 80/85						
THK-100	C 1809043	100 mm	7.5 x 10 mm	Nickel-plated brass	20	II
THK-120	C 1809031	120 mm	7.5 x 10 mm	Nickel-plated brass	20	II
THK-200	C 1809070	200 mm	7.5 x 10 mm	Nickel-plated brass	20	II
THK-280	C 1809106	280 mm	7.5 x 10 mm	Nickel-plated brass	20	II
THK-600	C 1809132	600 mm	7.5 x 10 mm	Nickel-plated brass	20	II
NTHK-100	C 1809056	100 mm	7.5 x 10 mm	V4 A (1.4571)	40	II
NTHK-120	C 1809005	120 mm	7.5 x 10 mm	V4 A (1.4571)	40	II
NTHK-200	C 1809082	200 mm	7.5 x 10 mm	V4 A (1.4571)	40	II
NTHK-280	C 1809118	280 mm	7.5 x 10 mm	V4 A (1.4571)	40	II
THK-100 x 17	C 1809157	100 mm	14.8 x 17 mm	Nickel-plated brass	20	II
THK-200 x 17	C 1809183	200 mm	14.8 x 17 mm	Nickel-plated brass	20	II
NTHK-100 x 17	C 1809169	100 mm	14.8 x 17 mm	V4 A (1.4571)	40	II
NTHK-200 x 17	C 1809195	200 mm	14.8 x 17 mm	V4 A (1.4571)	40	II

Type	Item No.	Length L	Diameter I x A*	Material	PG
Protective spiral for LR 80/85					
SWK 100	C 1809200	100 mm	10.5 x 17 mm	Nickel-plated steel	II
SWK 120	C 1809207	120 mm	10.5 x 17 mm	Nickel-plated steel	II
SWK 200	C 1809498	200 mm	10.5 x 17 mm	Nickel-plated steel	II
SWK 280	C 1809221	280 mm	10.5 x 17 mm	Nickel-plated steel	II

Type	Item No.	Length L	Ø screwed connection	Ø Spiral	Material	PG
Protective spiral for the fixing of capillaries in air ducts (JET/JMT/JTF/WR 81) and for the installation of all HF sleeve- and LF air sensors						
SW-200	C 1809219	200 mm	7.8 mm	11 x 17 mm	Nickel-plated steel	II
SW-200-12	C 1809220	200 mm	11.8 mm	11 x 17 mm	Nickel-plated steel	II

* I = minimum internal diameter
A = nominal external diameter

Dip sleeves and protective spiral for KR/LR 80/85 and sleeve- and air sensors

For applications in the industrial and heating technology field

